


---

# EXCITATION MODULE

---

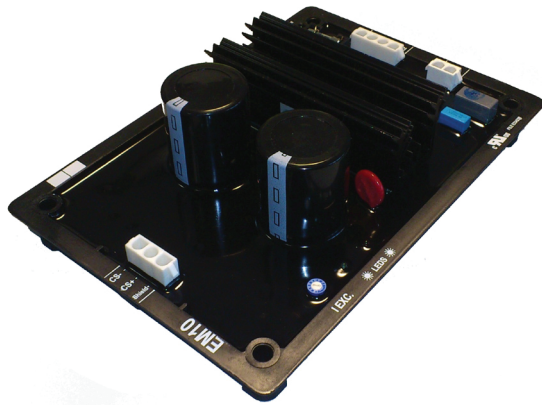

## EM10

The EM10 Excitation Module is a power electronics component designed to provide excitation current to the generator that is controlled by the Integrated Voltage Regulator (IVR) feature in the EMCP 4 controls.

Caterpillar is leading the power generation marketplace with power solutions engineered to deliver unmatched flexibility, expandability, reliability and cost-effectiveness.

---

## FEATURES

- Over-excitation protection – limit can be adjusted via a potentiometer (IEXC.)
- Green status LED indicating unit is powered on
- Red status LED indicating excitation current limiting (flashing) or shutdown (solid)

When used with EMCP 4.3/4.4 and IVR-compatible EMCP 4.1/4.2 controllers, the Integrated Voltage Regulator system offers:

- Automatic Voltage Regulation (AVR)
- Programmable stability settings
- Soft start control with an adjustable time setting in AVR control mode
- Dual Slope Under Frequency (Volts / Hz) regulation
- Three-phase or single-phase generator voltage (RMS) sensing/regulation in AVR mode

EMCP 4.3/4.4 and IVR-compatible EMCP 4.2 controllers also offer:

- Power Factor Regulation (PF)
- Generator paralleling with reactive droop compensation
- Line drop compensation

---

## WORLDWIDE PRODUCT SUPPORT

- Worldwide parts availability through the Cat® dealer network
- Over 1,800 dealer branch stores operating in 200 countries
- The best product support record in the industry
- Cat dealers provide extensive post sale support including maintenance and repair agreements

## COMPLETE SYSTEM INTEGRATION

Fully designed and factory tested to work seamlessly with Cat generators using Self Excitation (SE), Internal Excitation (IE) or Permanent Magnet (PMG) excitation systems and EMCP controls.

# EXCITATION MODULE – EM10



## SPECIFICATIONS


<b>ELECTRICAL</b>	
Generator Excitation Types	Self Excitation / Internal Excitation / Permanent Magnet (PMG)
Max. Continuous Field Current Output	6 Amps
Max. Forcing Field Current Output	10 Amps
Max. AC Voltage Input (X1:X2, Z1:Z2)	180 Vrms
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	-40 °C (-40 °F) to +70 °C (+158 °F)
Storage Temperature Range	-40 °C (-40 °F) to +85 °C (+185 °F)
Relative Humidity Tolerance	95% non-condensing humidity
Salt Spray	5% salt (NaCl) solution for 120 hrs
Vibration	4.5 G-rms, 24-2000 Hz in 3 orthogonal planes
Electromagnetic Compatibility	RF Immunity (Radiated & Conducted) RF Emissions (Radiated & Conducted) Electrical Transients
Weight	770 g ± 30 g
Power Consumption (at Max. Continuous Rating)	<450 VA
<b>CONFORMITY</b>	
UL	UL Recognized (U.S. and Canada) File No. E334232
CE Integration Certificate	In conformity with the applicable requirements of the following Standards: EN 50178 EN 60204-1 EN 61000-6-2 EN 61000-6-4

# EXCITATION MODULE – EM10



## OVER-EXCITATION PROTECTION


- If a short-circuit fault occurs at the generator terminals, the EM10 will allow the excitation current to rise to the upper limit value set by the adjustment potentiometer (max. 10 Amps).
- The excitation current will be clamped at the upper limit value for 10 seconds (fixed internally).
- After 10 seconds, the excitation current is reduced to a value of 10% of the potentiometer setting.

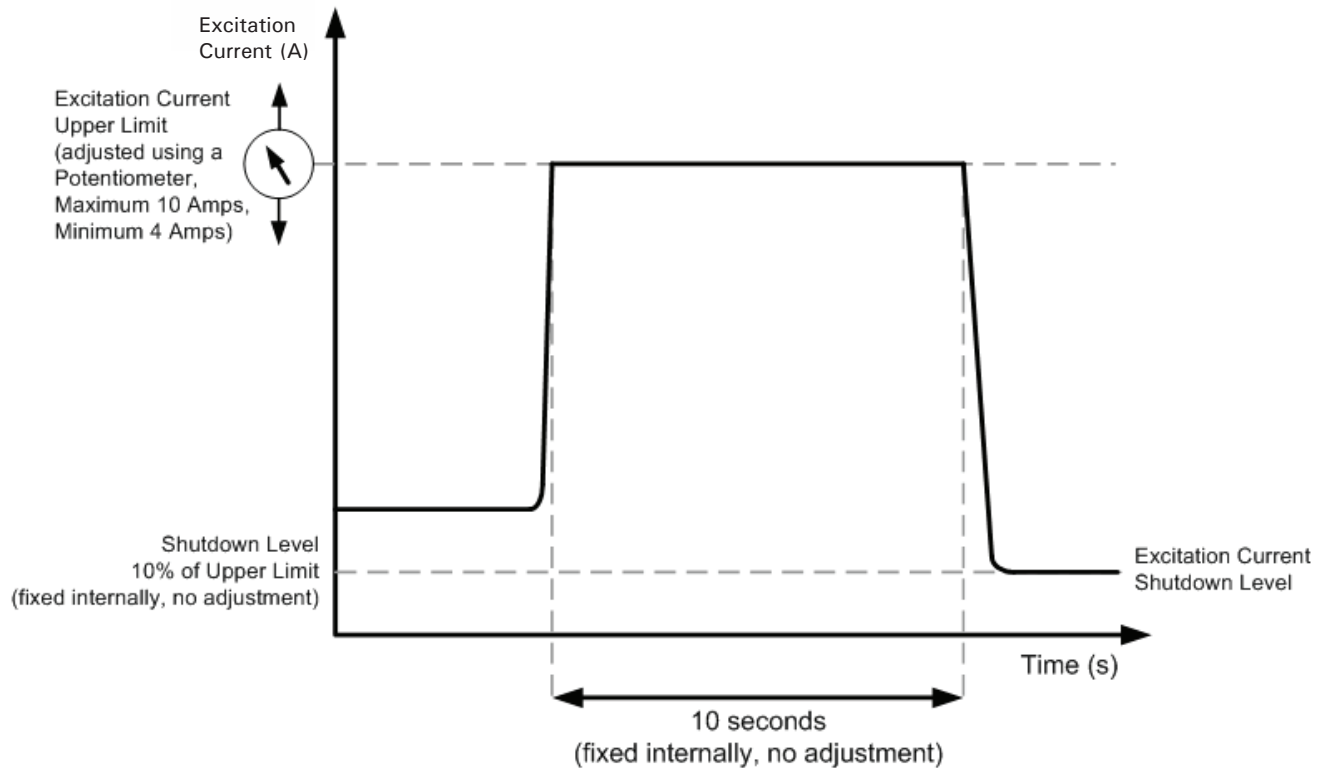

# EXCITATION MODULE – EM10




OUTLINE DRAWING (Dimensions in mm)

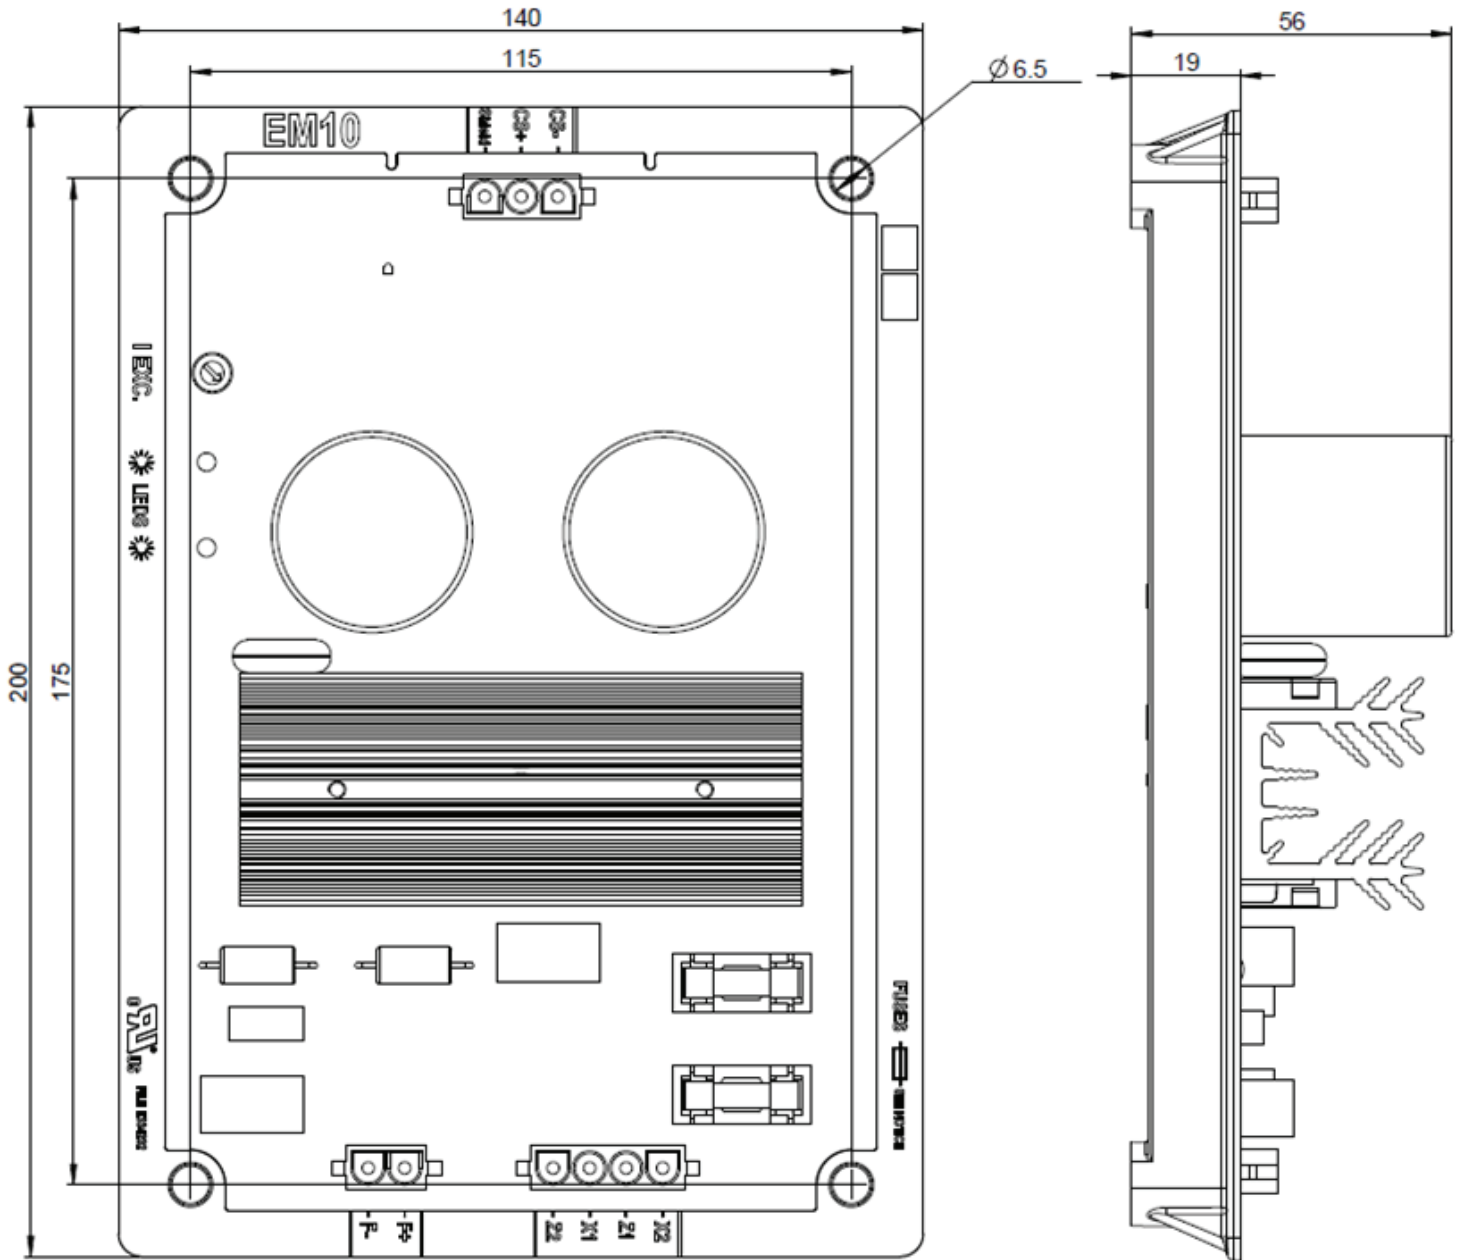

# EXCITATION MODULE – EM10



## EXAMPLE CONNECTION DIAGRAM (Permanent Magnet Excitation)

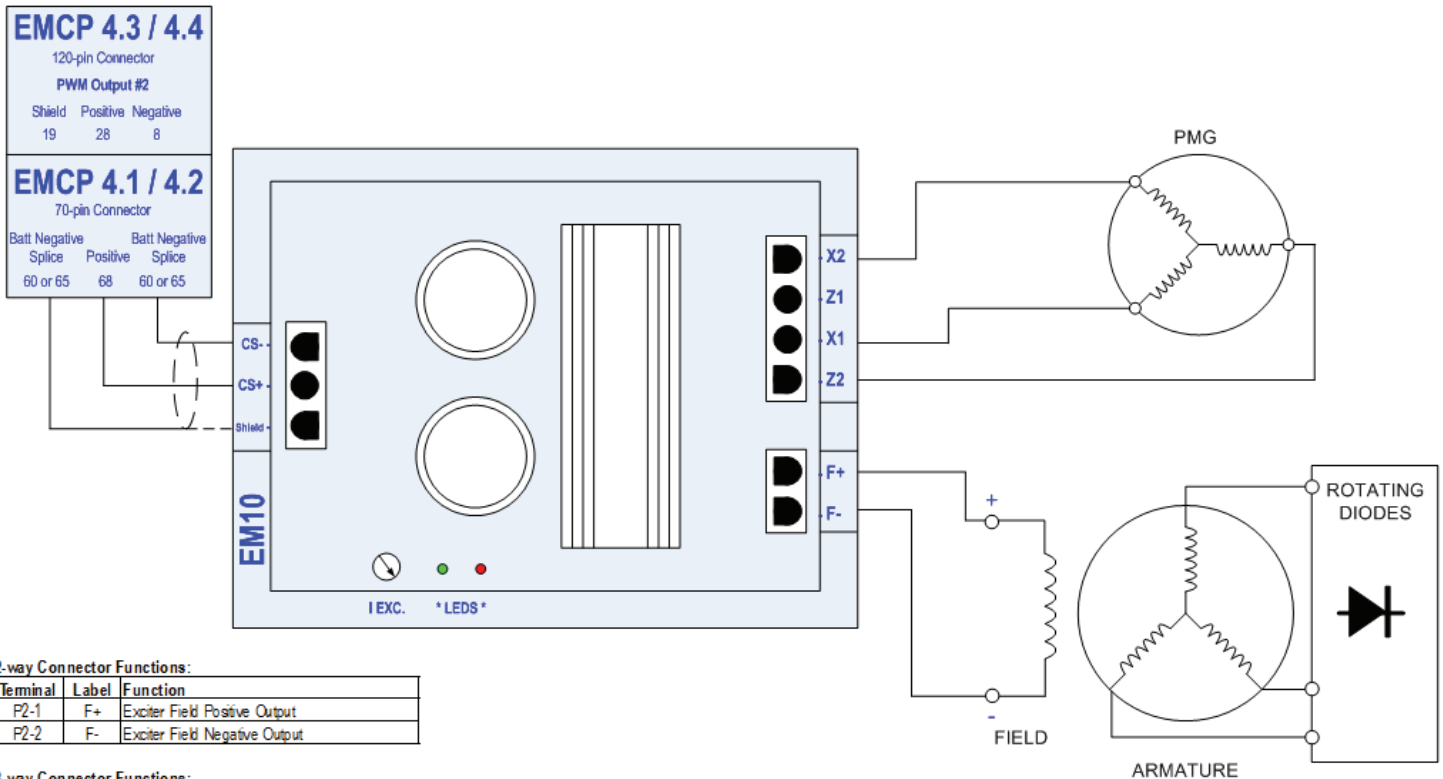

### 2-way Connector Functions:

Terminal	Label	Function
P2-1	F+	Exciter Field Positive Output
P2-2	F-	Exciter Field Negative Output

### 3-way Connector Functions:

Terminal	Label	Function
P3-1	Shield	Excitation Command Shield
P3-2	CS+	Excitation Command Positive Input
P3-3	CS-	Excitation Command Negative Input

### 4-way Connector Functions (PMG Excitation):

Terminal	Label	Function
P4-1	X2	Excitation Power Supply Input (PMG Phase B)
P4-2	Z1	Not Connected
P4-3	X1	Excitation Power Supply Input (PMG Phase A)
P4-4	Z2	Excitation Power Supply Input (PMG Phase C)

### 4-way Connector Functions (Self-Excitation):

Terminal	Label	Function
P4-1	X2	Excitation Power Supply Input (single-phase)
P4-2	Z1	Not Connected
P4-3	X1	Excitation Power Supply Input (single-phase)
P4-4	Z2	Not Connected

### 4-way Connector Functions (Internal Excitation):

Terminal	Label	Function
P4-1	X2	Excitation Power Supply Input (Aux Winding 1 - Positive)
P4-2	Z1	Excitation Power Supply Input (Aux Winding 2 - Positive)
P4-3	X1	Excitation Power Supply Input (Aux Winding 1 - Negative)
P4-4	Z2	Excitation Power Supply Input (Aux Winding 2 - Negative)

www.Cat-Electric Power.com  
 ©2013 Caterpillar  
 All rights reserved

**Materials and specifications are subject to change without notice.**  
 The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.