


CM3-Ethernet

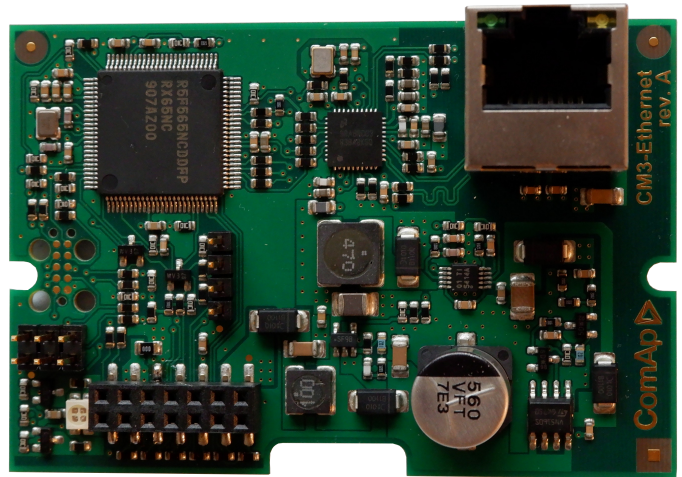

Order code: CM3ETHERXBX

Internet / Ethernet plug-in communication module

Datasheet


Product description

- › Internet connection via Ethernet network

Key features

- › Wired Internet connection via Ethernet port
- › AirGate 2 support
- › WebSupervisor support
- › Active e-mails
- › Modbus, SNMP protocols for local monitoring

Application overview

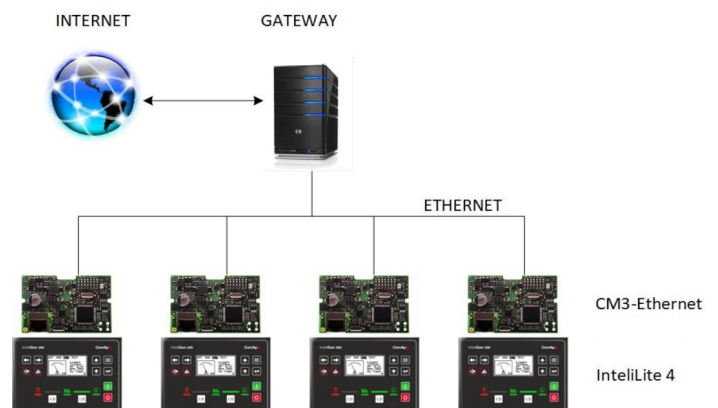

Technical data

General

Width × Height × Depth	73.8 × 50.3 × 21
Weight	~30 g
Power supply	8-36 V DC
Power consumption	1 W
Peak power consumption	2 W
Operating temperature	-40 °C to +70 °C
Storage temperature	-40 °C to +80 °C

Ethernet port

100 Mbit/s, full duplex
RJ45 socket

Certificates and standards

<ul style="list-style-type: none">> EN 61000-6-2> EN 61000-6-4> EN 60068-2-1, EN 60068-2-2> EN 60068-2-6 ed.2:2008> EN 60068-2-27 ed.2:2010> EN 60068-2-30:2005 25/55°C, RH 95%, 48hours	
---	---



E-mail: info@comap-control.com
Web: www.comap-control.com

